



WHITE HORSE CERAMIC INDUSTRIES SDN. BHD.
(Co. No. 216824-X)

HEADQUARTERS
PLO 464, Jln Gangsa, Zone 11, Pasir Gudang Industrial Estate,
81700 Pasir Gudang, Johor, Malaysia.
T (60 7) 251 8555 / 255 1010 **F** (60 7) 251 8222
E whcisb@whitehorse.com.my
W www.whitehorseceramic.com.my



WHITE HORSE
DIGITAL
Inkjet Printing Technology

INNOVATION
INNOVATION
EBANIS & LOOS

*Ultimate Quality,
Timeless Design*



EBANIS & LOOS SERIES

The Ebanis series and Loos series transports you to a nature-inspired world of beauty with elegant tiles that replicate the look and texture of natural wood. Better than wood, our tiles offer the warm glow and charm of natural wood but with the ease of care and durability that tile offers.

Perfect for homes and commercial areas, indoor and outdoor spaces, the tiles are visually attractive, scratch and stain resistant.

At White Horse, we always strive for ultimate quality and timeless design.

Designed for the Senses



EBANIS

HD66102 | 600X600mm



EBANIS

HD66104 | 600X600mm

Designed for
Inner Peace

LOOS

HD66002 | 600X600mm



LOOS

HD66003 | 600X600mm



LOOS

HD66004 | 600X600mm

PRODUCT COLOUR RANGE

EBANIS 600X600mm



HD66101



HD66102



HD66103



HD66104

LOOS 600X600mm



HD66001



HD66002



HD66003




HD66004


LAYING SCHEME




3200X3200

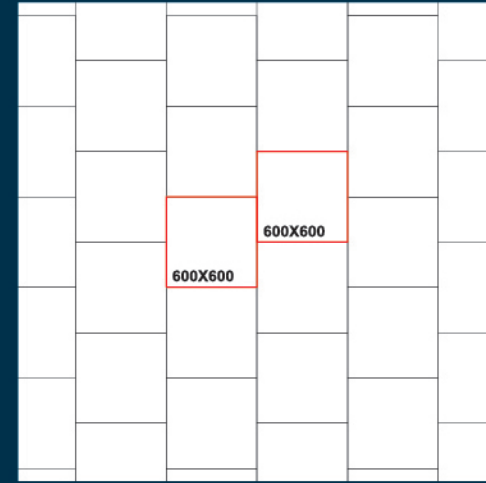


SCHEME 1

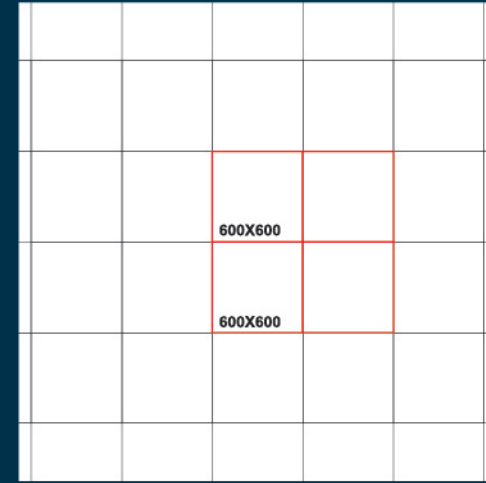

SCHEME 2

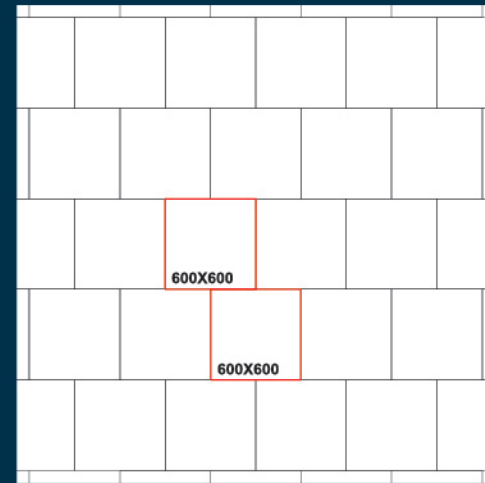

SCHEME 3

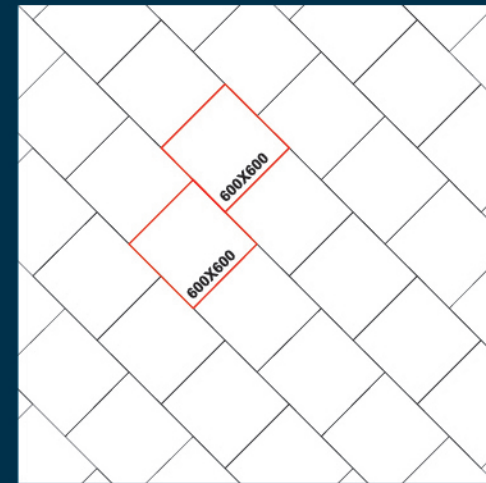


SCHEME 4

WHITE HORSE TEST REPORTS

| DIMENSIONS AND SURFACE QUALITY | PORCELAIN TILES - GROUP BIa | | PHYSICAL PROPERTIES | PORCELAIN TILES - GROUP BIa | | CHEMICAL PROPERTIES | PORCELAIN TILES - GROUP BIa | |
|--------------------------------|--------------------------------------------|------------------------------------------|------------------------------------------------|---------------------------------|-----------------------------------------------------------------------|--------------------------------------------------------------------|----------------------------------------------------------|-----------------------------------------------------------------|
| | ISO 13006 Standard | White Horse Tiles (Test Result By SIRIM) | | ISO 13006 Standard | White Horse Tiles (Test Result By SIRIM) | | ISO 13006 Standard | White Horse Tiles (Test Result By SIRIM) |
| Length and Width | ± 0.6% | Passed | Water Absorption | Maximum 0.5% | Average 0.07% Individual Maximum 0.10% | Chemical Resistance To Household Chemical Of Glazed Tiles | Minimum GB | No Visible Effect (GA) |
| Thickness | ± 5% | Passed | Breaking Strength | Not Less Than 1300N | Average 2000N | Chemical Resistance To Swimming Pool Salts Of Glazed Tiles | Minimum GB | No Visible Effect (GA) |
| Straightness of Sides | ± 0.5% | Passed | Modulus of Rupture | Minimum 35N/mm ² | Average 63N/mm ² Individual Minimum 56N/mm ² | Chemical Resistance To Hydrochloric Acid (3%) Of Glazed Tiles | GLA: No Visible Effect | GLA |
| Rectangularity | ± 0.6% | Passed | Resistance to Deep Abrasion of Unglazed Tiles | Maximum 175mm ³ | 126mm ³ | Chemical Resistance To Citric Acid (100g/l) Of Glazed Tiles | GLB: Definite Change In Appearance | GLA |
| Flatness of Surface | ± 0.5% | Passed | Resistance to Surface Abrasion of Glazed Tiles | Class 3: For Normal Footwear | Class 4 | Chemical Resistance To Potassium Hydroxide (30g/l) Of Glazed Tiles | GLC: Partial Or Complete Loss Of The Original Surface | GLA |
| Centre Curvature | | | | | | | | |
| Edge Curvature | | | | | | | | |
| Warpage | ± 0.5% | Passed | Crazing Resistance | No Crazing Observed | Passed | Staining Resistance Test Of Glazed Tiles | Minimum Class 3 | Class 5 (Stain Can Be Easily Removed With Running Hot Water) |
| Surface Quality | A minimum of 95% free from visible defects | Passed | | | | | | |

SHADE & TONALITIES

V1 UNIFORM FROM TILE TO TILE



V1

Colour range and tonality within the same shade is fairly uniform from tile to tile.

Minimal to zero difference among tiles from the same production run.

V2 SLIGHTLY NOTICEABLE FROM TILE TO TILE



V2

Colour range and tonality within the same shade is slightly noticeable from tile to tile.

Visibly distinguished difference in design or pattern with minimal change in colour tones.

V3 MODERATELY NOTICEABLE FROM TILE TO TILE



V3

Colour range and tonality within the same shade is moderately noticeable from tile to tile.

Visibly distinguished difference in design or pattern.

V4 DISTINCTLY NOTICEABLE FROM TILE TO TILE



V4

Colour range and tonality within the same shade is distinctly noticeable from tile to tile.

Random colour differences from tile to tile create the possibility of unique tile compositions.

- The accuracy of colours shown in this brochure is as close as the printing process will allow.
- The appearance of tiles featured in this brochure may differ from the actual items sold. The pictures are only illustrative of the tile combinations.
- White Horse Ceramic Industries Sdn. Bhd. reserves the right to amend the colour range or specifications of tiles at any time and without notice.